



*Ready to Perform
To Your Applications*



www.mitforklift.com.sg

Copyright © 2013. All rights reserved. All registered trademarks are the property of their respective owners. Some products may be shown with optional equipment.

FMIT0119

(03/13)

PRESENTED BY:

Note: Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your Mitsubishi forklift truck dealers. Mitsubishi Forklift Trucks follows a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.



CLASIDIA

Classic Diamond

Internal Combustion Pneumatic Tyre
2.0–3.0 ton

Ready To Perform To Your Applications

POWERFUL AND RELIABLE

Mitsubishi **CLASIDIA** *Classic Diamond*

Mitsubishi Forklift Trucks is proud to announce a new model in its line up of reliable Forklift Trucks – **the Clasia**.

The Clasia is designed to meet the needs of growing businesses that require a durable, reliable and versatile forklift to carry out day-to-day goods loading, moving and unloading requirements.



• Truck is displayed with optional items

PERFORMANCE

The Clasia forklift truck offers growing business the productivity boost of machine-powered loading, moving and unloading of materials. Thanks to the Clasia's straightforward layout and design, operators will benefit from more headroom, legroom and visibility in the cab. Mitsubishi Forklift Trucks' commitment to quality and reliability means the Clasia will be continue to be a good return on investment for years to come.

Powerful Lifting Capacity

Mitsubishi Clasia forklift are constructed with a low center of gravity frame that optimizes vehicle balance and stability during lifting. That means a greater load capacity with much greater stability. The high-torque, high-power engine maintains a stable lift speed regardless of the load, helping operators to increase productivity.



■ EXCELLENT LIFTING ABILITY

Lift speed: **640mm/s** (when loaded)
670mm/s (when not loaded) •FD25HS
No capacity deration up to a height of 4 meters (2-stage mast).

Compact Turning

Tight turns are easy with the Clasia thanks to a fully hydraulic power steering. Its maneuverability allows for easy U-turns and navigation in small workspaces.

■ EXCELLENT STEERING ABILITY



Minimum turning radius
2325 mm •FD25HS

■ CLASIA IS EASY TO MANEUVER EVEN IN CRAMPED WAREHOUSES AND DELIVERY BAYS


Right angle stacking aisle width
4085mm •FD25HS



PERFORMANCE

The Clasidia comes standard with a lot of features not often found on some other forklift trucks.

- 1. Integrated Digital Monitor**
Easy to read. Unobstructed view from driver's seat.
- 2. Wide Cab Visibility**
Excellent forward visibility. Greater rear visibility.
- 3. Reinforced overhead guard for safety.**
Overhead guard design allows for excellent forward visibility without compromising on operator's safety and comfort outdoors
- 4. Mast Interlock**
Clasidia is equipped with an integral mast interlock system when key switch is turned off. The mast movement is locked when key switch is turned off in order to prevent injury or damage to property.
- 5. Tilting Steering Column**
Because all operators aren't the same size or build, Clasidia incorporates a tilting steering column that allows drivers greater comfort.
- 6. Additional Safety: Neutral Safety Start** prevents the engine from starting unless the control lever is positioned in neutral. Eliminates starting truck, while in gear.

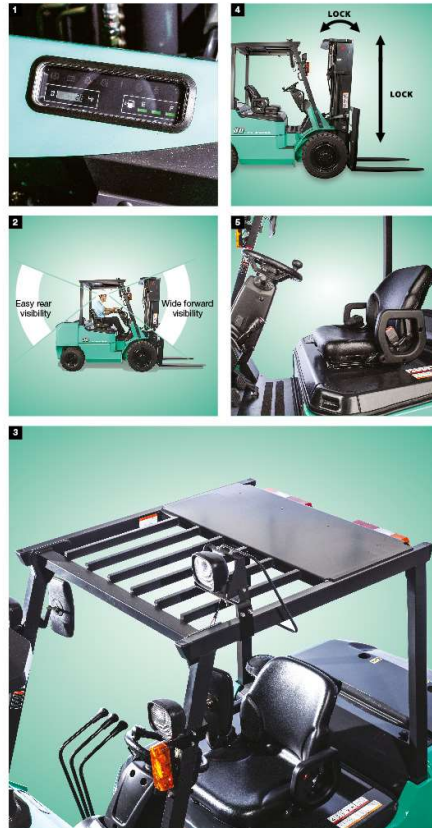

RELIABILITY AND SERVICEABILITY

A Strong Performer, Built Tough to Last Longer

1. 44kW Diesel Engine

Inside every Clasidia diesel forklift is a beefy 44kw engine, which makes for strain-free performance and allows high lifting and travel speeds for all operations. Clasidia gasoline forklift trucks are equipped with the renowned K25 dual fuel engine with the flexibility of either using gasoline or LPG.

2. Floating Power Train

To manage all that Power, Clasidia is equipped with a full-floating power train that isolates vibrations from the engine to the frame and chassis. This isolation not only increases operator comfort in the cab but, more importantly, also reduces wear on vital parts and forklift drive train components.

3. Optimal Airflow and Cooling

Clasidia is designed, engineered and built with reliability in mind. To illustrate this, truck's cooling system is designed to operate in tropic conditions where the ambient temperature is usually high. To prevent overheating and excessive heat, cool air is moved through the engine compartment and radiator by a powerful cooling fan through the counterweight opening, which ensures the engine operates at optimum performance levels. The improved air circulation also means that there is less stress on vital engine components and that helps ensure truck reliability.



Serviceability

The new Clasidia was designed so that troubleshooting and repairs are easy and require no specialized tools. Access to the engine bay is as simple as pushing a small button and lifting up engine cover. The engine bay is well laid out and there is plenty of room to carry out routine maintenance, service or repairs.

- Easy access to engine
- No specialized tools necessary
- Large engine bay access




STANDARD SPECIFICATIONS


CHARACTERISTICS										
1	Type of Truck				DIESEL ENGINE TRUCK			GASOLINE ENGINE TRUCK		
2	Model				FD20HS	FD25HS	FD30HS	FG20S	FG25S	FG30S
3	Loading Capacity		Kg		2000	2500	3000	2000	2500	3000
4	Load Center		mm		500			500		
PERFORMANCE										
5	Maximum Fork Height		mm	A	3000	3000	3000	3000	3000	3000
6	Free Fork Height		mm	B	140	140	145	140	140	145
7	Speeds	Lifting	Loaded		640	640	510	580	580	460
			Unloaded		670	670	545	660	660	530
		Lowering	Loaded		500	500	530	500	500	530
			Unloaded		500	500	500	500	500	500
8	Tilt	Mast	Forward	deg	6					
			Backward	deg	10					
9	Speeds	Traveling	Loaded	km/h	19	19	19	19	19	19
			Unloaded	km/h	19.5	19.5	19.5	19.5	19.5	19.5
10	Maximum Drawbar Pull	stationary on slope	Loaded	N	20000	19700	19400	18600	18400	18300
		at 1.6km/h	Loaded	N	17800	17600	17200	16200	16000	15800
11	Maximum Gradeability	stationary on slope	Loaded	%	40.4	34.2	27.7	38.1	32.2	26.5
		at 1.6km/h	Loaded	%	35.6	30.2	24.5	32.8	27.8	22.8
12	Turning Radius		mm	C	2300	2325	2415	2300	2325	2415
13	Practical Intersecting Aisle Width		mm	O	2230	2240	2335	2230	2240	2335
14	Practical Aisle for Right Angle Stacking		mm		4055	4085	4210	4055	4085	4210
DIMENSIONS										
15	Overall Length to Fork Face		mm	D	2525	2560	2690	2525	2560	2690
16	Width	with Standard Tires	mm	E	1165	1165	1285	1165	1165	1285
17	Height	with Lowered Mast		F	1990	1990	2015	1990	1990	2015
		with Extended Mast (with backrest)		G	4055	4055	4055	4055	4055	4055
		to top of Overhead Guard		H	2075	2075	2095	2075	2075	2095
18	Forks (Thickness x Width x Length)		mm	I	45X100X920	45X100X1070	45X122X1070	45X100X920	45X100X1070	45X122X1070
19	Forks Spread (Out-to-Out Minimum / Maximum)		mm	J	244/1000		285/1000	244/1000		285/1000
20	Front Overhang (Center of Front Axle to Fork Face)		mm	K	455	460	495	455	460	495
21	wheelbase		mm	L	1650	1650	1670	1650	1650	1670
22	Tread Width	Front, standard Tires	mm	M	960	960	1060	960	960	1060
		Rear, Tires	mm	N	980	980	980	980	980	980
		at Lowest point mast	mm		115	115	135	115	115	135
23	Ground Clearance	at Center of Wheelbase	mm		165	165	185	165	165	185
24	Tire Size	Front	mm		7.00-12-12PR		28X9-15-12PR	7.00-12-12PR		28X9-15-12PR
		Rear	mm		6.00-9-10PR		6.50-10-10PR	6.00-9-10PR		6.50-10-10PR
WEIGHT										
25	Machine Weight		kg		3373	3665	4300	3266	3557	4193
BRAKE										
26	Service Brake Type				Hydraulic					
27	Parking Brake Type				Hand Operated					
POWER TRAIN										
28	Engine	Model			S4S Tier 2			K25		
		Max. Rated Power/rpm to DIN70020	kW/rpm		44/2300			40/2200		
		Max. Rated Torque/rpm to DIN70020	Nm/rpm		183/1800			186/1600		
		Displacement	cc		3331			2488		
		Fuel Tank Capacity	L		66					
29	Transmission	Type			ATM(TORQUE CONVERTER)					
		Forward			1					
		Backward			1					
30	Relief of Pressure	For Attachments	Mpa		18.1					



Mast

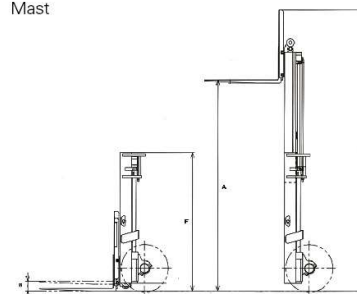

Side View

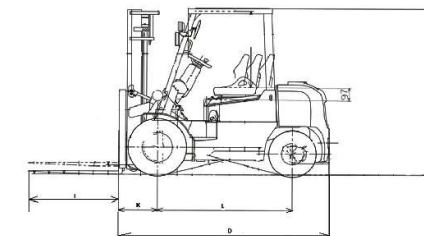

Top View

