

TCM

FB-VIII SERIES

ELECTRIC COUNTERBALANCED FORKLIFT TRUCKS



1.0-3.5tons

Class 1 - sit-down type

Beyond the limits!

FB-VIII SERIES

ELECTRIC COUNTERBALANCED FORKLIFT TRUCKS



Ecology and Economy P.03

Comfortable operation P.05



Safety P.07



The latest fruit of the long years of pursuit of the top quality electric vehicles on the material handling scene, TCM FB-VIII Series electric counterbalanced forklift trucks feature enhanced environmental friendliness and increased economy.

They meet the needs of the times, and provide better operator comfort and controllability. This is attained by ergonomically designed controls and seating, and many safety devices which help protect the operator from a variety of potential hazards.

TCM FB-VIII has broken through various limits in electric forklift technology to reach a new dimension in electric vehicles.

A new type of AC motor
AC motors are used for both the drive and the lift systems, to attain better controllability and low maintenance.



Fully-hydraulic Orbitrol power steering (standard)

The power steering system uses Orbitrol, a fully-hydraulic power steering system that features low maintenance costs.

The easy-to-read LCD panel includes a power consumption rate and a remaining battery time screen

The multi-function LCD panel shows power consumption per hour and remaining battery time. You can easily check the truck's power consumption at a glance for better energy savings.



The LCD panel allows the operator to check present power consumption. The indicator shows power consumption per hour. "Remaining battery time" is the length of time the truck can keep operating before it needs a recharge. ☞ The "remaining battery time" reading is not necessarily perfectly accurate, because it is calculated using the reading of the battery charge indicator. It should be used as a rough guide.

Hour meter

	START	TOTAL	KEY SW	DRIVE	PUMP	TRAVEL	WORK	RATE
	408	409	409	7.5	7.3	3.8	2.1	
				4.0	3.6	2.1		
				1.7	1.1	1.7		
				0.1	0.1	0.1		
				3.6	6.5	7.1	3.8	
Total				44.6	34.2	37.2	9.9	
Operating time								

Data on the past three shifts
Data on the present shift

Longer battery runtimes per charge

(For trucks with optional EPS)

The long (8.5 hour) battery runtime on a single charge has been achieved by using a highly-efficient AC drive motor that draws less current and various types of regenerative braking switch-back, accelerator-off and braking regeneration.

(The values were measured on an FB15 with optional EPS working in our specified work cycle pattern at an operating rate of 55% in the P operating mode.)
☞ The explanation above applies to trucks with an optional EPS unit. Trucks with standard Orbitrol power steering will have a 15 to 20% shorter battery run time.

Auto power-off

The power supply is turned off automatically if the operator's seat is left vacant or no operation is performed over a set period of time. This helps eliminate wasteful consumption of battery current as well as prevent accidents when the operator gets back on the truck.




Enhanced environmental friendliness and increased economy


Saving the planet and keeping worksites clean!

Our times demand ecology-mindedness. TCM FB-VIII battery-powered forklift trucks promise to be the ecology-minded contender on the materials handling scene, all around the world. Lower power consumption and longer spans between battery charges improve productivity as well as achieve environmental friendliness.

TCM FB-VIII Series is what the planet and the logistics industry really need.

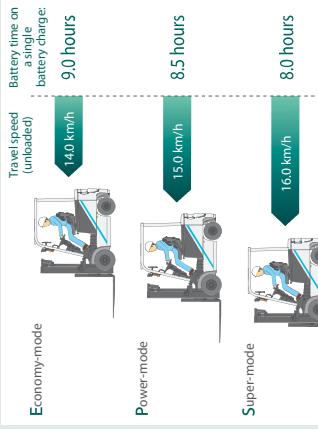

(The values were measured on an FB15 with optional EPS working in our specified work cycle pattern at an operating rate of 55% in the P operating mode.)

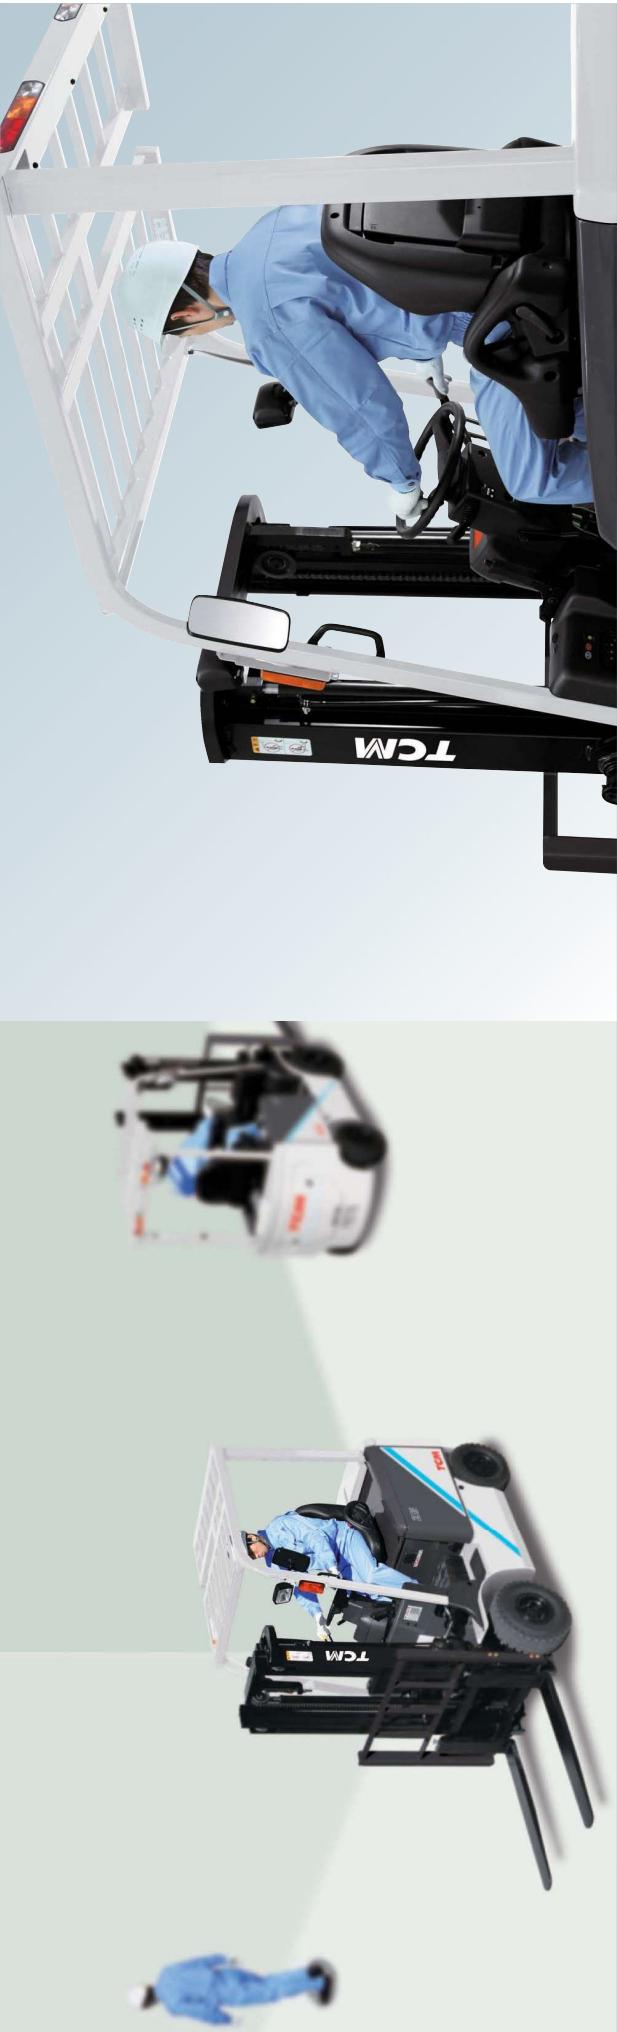

Better operator comfort and controllability

Ergonomics for people working on-site

With an ergonomically designed operator's compartment and a compact body, FB-VIII Series electric counterbalanced forklift trucks offer better operator comfort and enhanced controllability. Assuming materials handling operation in warehouses, where operators need to get on and off the truck frequently, a variety of thoughtful ideas, including a low floor and step heights, and wide steps, have been incorporated to reduce operator motion and fatigue. The long years of experience and expertise went into helping the FB-VIII Series meet worksite needs.

The most compact truck body in its class

The compact truck body, with a minimum turning radius as short as 1800 mm, delivers substantially improved work efficiency in the narrow aisles of a warehouse. The safety seat with side supports protect the operator better. The seat also has an angle-adjustable reclining back to suit the operator's physique, thus helping reduce operator fatigue.



An integrated turn signal and lighting switch lever

The turn signal lever and lighting switch are integrated into one unit. It returns automatically to neutral when the steering wheel goes back to the straight-ahead position. Rear combination lights are located on the over head guard for better visibility from behind in the workplace.



Tilting steering column

The steering wheel angle can be adjusted to the operator's preference, which means more efficient steering with less fatigue.

Low operating noise during load handling

Having an AC motor for the load handling system substantially reduces the noise level at the operator's ear (by 6 dB from the conventional model) when lifting the forks, thus lending to substantially improved operator comfort (refers to the FB15).

Simplified battery replacement system (optional)

If a truck needs to be operated for an extended period of time, a simplified battery replacement system will be optionally available for easy replacement with a spare battery.




Bigger floor space

The generous floor space makes getting in and out anxiety-free as well as providing more knee room to reduce operator fatigue.




Super equalizing charge

If the battery charger is set to the "super equalizing charge" mode, an equalizing charge will be applied to the battery every 24 hours, at the end of a regular cycle charge. This means that the battery will be fully charged and you can use it immediately, even after the truck has been out of service for a long period of time.

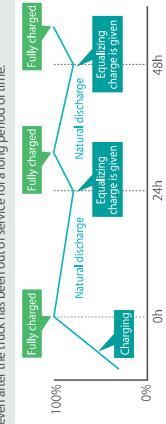

Fork positioning laser unit (optional)

The fork-positioning laser unit helps the operator check the fork height and makes it safe and easy to insert the forks into the openings of a pallet. It also helps reduce damage to loads and pallets if the operator fails to determine the fork height correctly. This function is especially useful for stacking or unstacking loads in high locations, and for handling loads in a dark area.

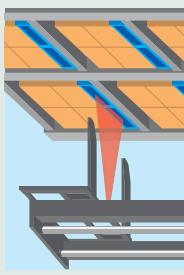

※ The laser beam is only lit when the forks are level.



Safety

Operator safety is foremost with the FB-VIII series trucks

In pursuit of the ultimate in operator safety, FB-VIII Series trucks come equipped with many safety devices to protect from a variety of hazards which might occur in materials handling operation. Consideration to the safety of operators, an invaluable asset to each company, is foremost at all times with TCM forklift trucks.



Travel and load handling interlock(optional)

The travel and load handling interlock system makes it impossible to operate the lift truck unless the operator is well seated in the operator's seat. This system helps prevent an accident from happening if the operator of the truck is not in the correct driving position or a control is moved unintentionally when he is not in the operator's seat.



Interlock warning light

Interlock is activated when the operator stands up from the seat
※When the interlock system is actuated, the regular brake is not applied to the truck.
Apply the parking brake when leaving the truck.

Password entry

The truck won't start unless the correct password is entered into the password entry system. This prevents any unauthorized person from operating the truck.

※Consult with our service personnel to learn how to make the password entry system and set passwords. (Password protection can be disabled.)



Load meter (optional)


The load meter shows the approximate weight of the load being carried on the forks, to help prevent an accident due to overloading.

※The reading should be used as a guide.



Speed limiter

The maximum travel speed can be limited according to the working conditions. It can be set freely to a specified speed limit.

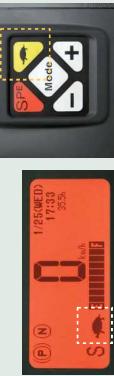

Speed limiter in operation

※Consult with our service personnel to learn how to set speed limits.

Steering-angle sensitive travel speed limiter

The truck speed is automatically reduced if the angle of the steering wheels exceeds a certain value, making it possible for the truck to turn at a safe speed.
※Remember that this feature is not intended to be a device that prevents tip-overs.

Speed-sensitive power steering

The speed-sensitive power steering system provides varying amounts of assistance depending on the driving conditions (more power assist at slow speeds and less power assist at high speeds) to give an excellent steering "feel" while improving the stability of the truck at high speeds.

Wide-view mast

The wide-view mast gives you an excellent view of the fork tips in any position. In addition, the lower dashboard provides the operator with excellent visibility, resulting in safe and quick operation.



Anti-rollback

The anti-rollback feature prevents the truck from rolling backwards abruptly on a grade if you remove your foot from the brake pedal. This ensures a safe, smooth restart.



Easy Maintenance



The fully openable battery compartment with a damper provides for easy access and quick maintenance access to the battery unit.

Drive and hydraulic motor controllers have been located together for quick access and easy servicing. They have also been made more resistant to dust and water.

A wide product lineup

The FB-VIII Series comes in a wide range of models, from compact classes with the superb features that the preceding series have to 3.5-ton models, reliable workhorses for handling heavy loads.

Model	Max. capacity	Overall height	
FB10-8	1,000 kg	2,080 mm	
FB15-8	1,500 kg	2,080 mm	
FB18-8	1,750 kg	2,080 mm	
FB20-8	2,000 kg	2,125 mm	
FB25-8	2,500 kg	2,125 mm	
FB25-8LB	2,500 kg	2,250 mm	High capacity model Battery capacity 93 Ah/h
FB25-8V	2,500 kg	2,100 mm	VAN model Suitable for loading and unloading vans
FB30-8	3,000 kg	2,190 mm	
FB30-8V	3,000 kg	2,100 mm	VAN model Suitable for loading and unloading vans
FB35-8S	3,500 kg	2,190 mm	



Standard specifications		UNICARRIER							
Manufacturer	Model	FB10-8	FB15-8	FB18-8	FB20-8	FB25-8	FB25-8V	FB30-8V	FB35-8S
Chassis dimensions		Kg	1000	1500	1750	2000	2500	3000	3500
Load Center	mm	mm	mm	mm	mm	mm	mm	mm	mm
Maximum Fork Height	mm	A	F	155		110		165	170
Free Lift	mm	F		920 x 100 x 35		1070 x 122 x 40		1070 x 125 x 46	1070 x 150 x 56
Fork size	L x W x T	mm	L						
Tilt Angle	Fwd / Bwd	deg	D/E						
Overall Length (without Forks)	mm	I	2875	2975	3315	3355	3460	3580	3805
Overall Width	mm	J	1955	2055	2245	2285	2390	2510	2735
Mast Height Fork Lowered	mm	B	1985		1150			1225	1380
Overall Height Fork Raised	mm	C		2030	2180	2030		2076	2135
Overhead Guard Height	mm	K	2080 (2140 ^a)		2125 (2185 ^a)	2250	2100	2190 (2250 ^b)	4260
Turning Radius (Outside)	mm	H	1830 (1730 ^a)	1890 (1730 ^a)	2100 (1970 ^a)	2200 (2065 ^b)	2290 (2140 ^b)	2500 (2360 ^b)	
Fork Opening (Centerline to front face of forks)	mm	M	375		435			480	500
Performance	Speeds	Level Max. ⁽¹⁾ (Fwd / Rev.)	With Load Without Load	km/h	km/h	km/h	km/h	km/h	km/h
Weight	Lifting ⁽¹⁾	With Load Without Load	mm/s	390	350	330	290	265	280
Chassis	Total Weight (without battery)	kg	2030	2050	2100	2030	2060	2065	2015
	Tires	Size	Front	Front	Front	Front	Front	Front	Front
			Rear	Rear	Rear	Rear	Rear	Rear	Rear
	Wheelbase	mm	N	1250	1350	1400	1545	1600	1800
	Fork Spread (Outside)	mm	P	200 - 920	910				
	Tread	mm	Front		900				
		mm	Rear						
	Under clearance at lowest point	mm		90		100			90
	Battery (Std capacity) type (Capacity [5-hour rating])	V / Ah							
	Electric Motors and Controller	kW / h0/min							
	Electric Motors	Drive motor (AC)		48 / 330	48 / 400	48 / 565	48 / 865		72 / 450
		Hydraulic motor (AC)		6.9			8.5		11.9
	Control Type	Drive			9.0				14.0
	Electric Motors and Controller	Load handling						FET Inverter	

⁽¹⁾ Above figures are measured at "Supermode" operation. ⁽²⁾ Batteries are optional equipment. ⁽³⁾ For European export trucks.


^a Figures are given for trucks with optional EPS.

^b Figures are given for trucks with optional PS.


These specifications are subject to change without notice.

TCM

Load chart

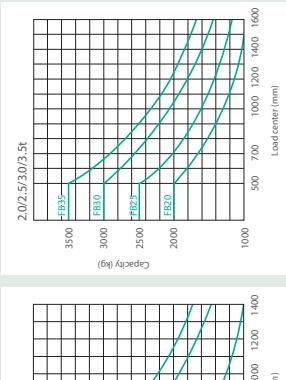

Standard dimensions

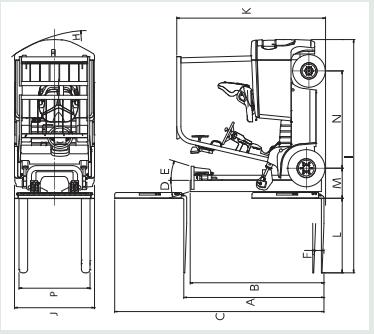



- UniCarriers Corporation retains the right to change these products and specifications without incurring any obligation relating to such changes.
- These products and specifications are subject to change without notice.
- Photos and illustrations may slightly differ from the actual trucks.
- Photos and illustrations may or may not include optional equipment and accessories.
- Features and specifications may vary depending on markets.
- Performance data and dimensions are nominal and subject to tolerances.
- Produced in ISO certified factory.